

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 December 2004 (23.12.2004)

PCT

(10) International Publication Number
WO 2004/110605 A1

(51) International Patent Classification⁷: **B01F 5/02**

(21) International Application Number:
PCT/AU2004/000786

(22) International Filing Date: 15 June 2004 (15.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003903192 19 June 2003 (19.06.2003) AU

(71) Applicant (for all designated States except US): COMMONWEALTH SCIENTIFIC AND INDUSTRIAL RESEARCH ORGANISATION [AU/AU]; Limestone Avenue, Campbell, ACT 2612 (AU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): WU, Jie [AU/AU]; Graham Road, Hightett, Victoria 3190 (AU). GRAHAM,

Lachlan [AU/AU]; Graham Road, Hightett, Victoria 3190 (AU). KILPATRICK, Tony [AU/AU]; Graham Road, Hightett, Victoria 3190 (AU).


(74) Agents: HENSHAW, Damon et al.; 1 Nicholson Street, Melbourne, Victoria 3000 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: JET DEVICE FOR MIXING FLUID

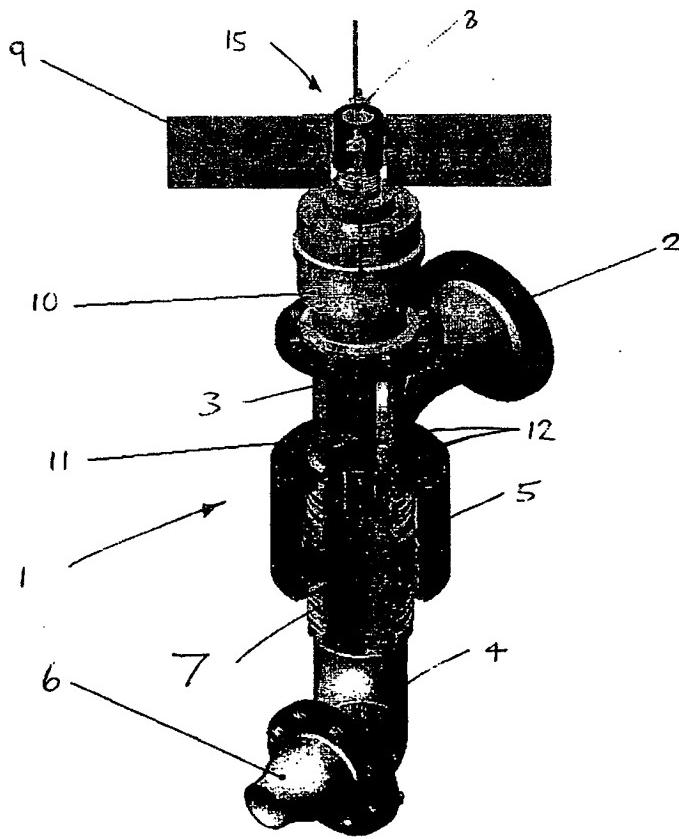

(57) Abstract: A jet device (1) with an outlet (4) having a nozzle (6) arranged to rotate as fluid exits the device, wherein the nozzle is adapted to feed fluid into a tank and cause mixing of the contents of the tank as a result of fluid flow from the rotating nozzle. Preferably, the device has a control assembly (15) for controlling rotation of the nozzle.

WO 2004/110605 A1



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.